
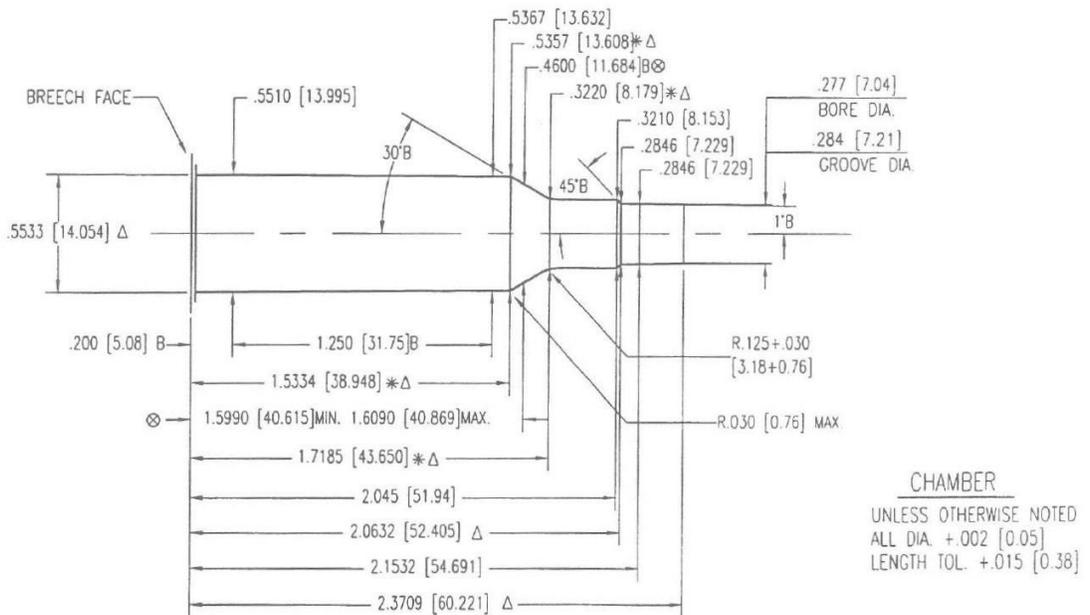


NOTICE: This drawing is subject to change.
 Current version is available at www.saami.org.

MAXIMUM CARTRIDGE / MINIMUM CHAMBER
**7MM REMINGTON
 SHORT ACTION ULTRA MAGNUM**

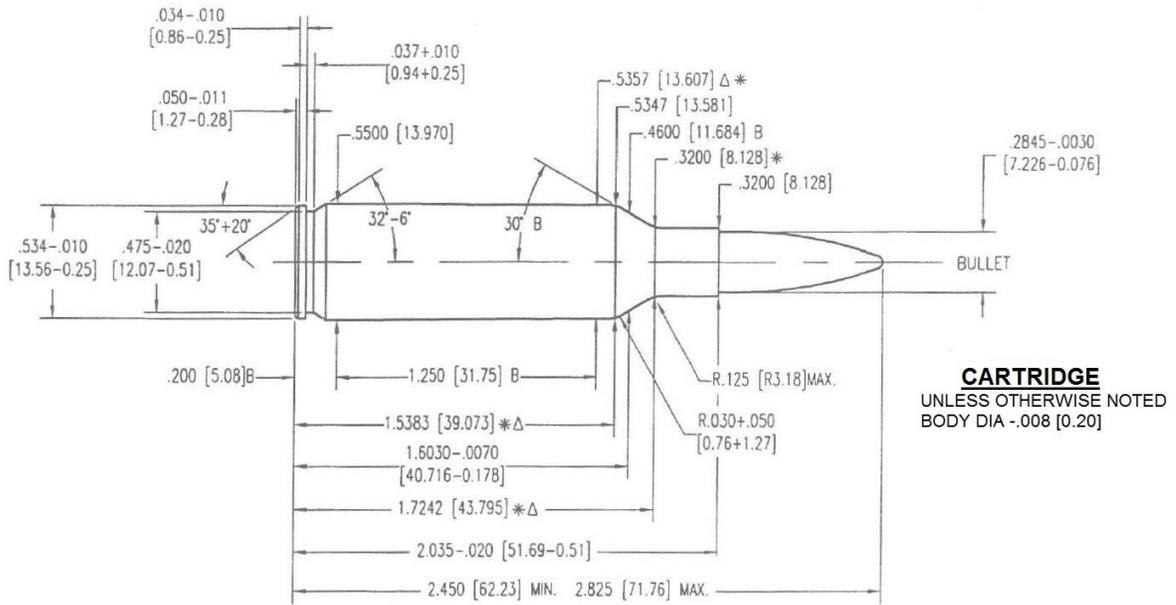

NOTE:
 B=BASIC
 [XX.XX]=MILLIMETERS
 ⊗ = HEADSPACE DIMENSION
 Δ = REFERENCE DIMENSION
 * DIMENSIONS ARE TO INTERSECTION OF LINES
 ALL CALCULATIONS APPLY AT MAXIMUM MATERIAL CONDITION (MMC)

Δ 6 GROOVES
 Δ .110+.002 [2.79+0.05] WIDE
 TWIST: 9.25 [236] R.H. OPTIONAL
 MIN. BORE & GROOVE
 AREA: .0626 SQ. IN. [40.390 mm²]

7mm REMINGTON SHORT ACTION ULTRA MAGNUM