


CARTRIDGE

7mm Remington Magnum - 160 grain

Version 8.0

Nosler®
UP FRONT

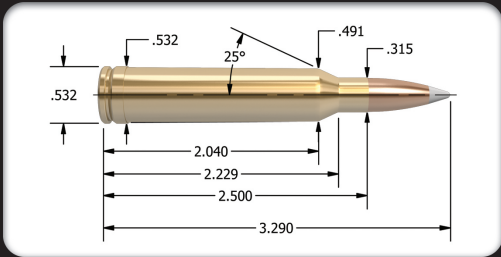

7mm Remington Magnum - 160 grain 7mm (.284")

MAXIMUM S.A.A.M.I. O.A.C.L. 3.290"			TESTED O.A.C.L.	B.C.	S.D.	
AccuBond®			160gr. Spitzer	3.290"	0.531	0.283
Partition®			160gr. Spitzer	3.290"	0.475	0.283
CASE TYPE:	Nosler		PRIMER TYPE		Fed 215	
CASE HOLDS:	80.4	Gr. WATER	BARREL Length/Make		24" Wiseman	
			BARREL Twist		1-9"	

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
Viht N165 Most Accurate Powder Tested	61.0 * MAX.	2904	84%
	59.0	2846	82%
	57.0	2789	79%
IMR 4064	53.0 * MAX.	2908	72%
	51.0	2823	70%
	49.0	2738	67%
IMR 4350	60.0 * MAX.	2998	79%
	58.0	2943	76%
	56.0	2888	74%
IMR 4831	63.0 * MAX.	3008	83%
	61.0	2933	81%
	59.0	2858	78%
IMR 7828	64.0 MAX.	3015	85%
	62.0	2934	82%
	60.0 *	2859	79%
RL19	61.5 * MAX.	3046	83%
	59.5	2973	80%
	57.5	2901	78%
RL22	63.0 MAX.	3058	85%
	61.0	2963	82%
	59.0 *	2868	80%
RL25	70.0 MAX.	3066	95%
	68.0 *	2989	92%
	66.0	2931	89%
MAGPRO	72.0 MAX.	3077	92%
	70.0	2989	90%
	68.0 *	2930	87%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary
* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.
In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data."

* = Most accurate load tested

** = Compressed load