

243 Winchester with 85 gr Spitzer BTSP

SPEER®

Max Case Length: 2.045"


Trim-to Length: 2.035"


Max Cart. OAL: 2.710"

RCBS Shell Holder: # 3

Test Firearm: Universal Receiver

Barrel Length: 24"

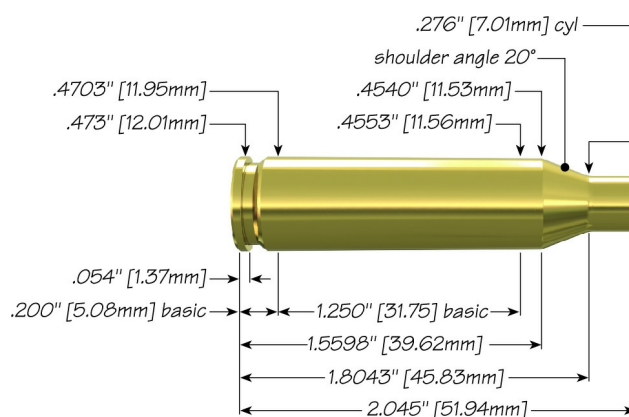

6mm	Speer Part No.	Weight, grains	COAL Tested	Ballistic Coefficient	Sectional Density
 85 gr Spitzer BTSP	1213	85	2.625"	.380	.206

Propellant	Cartridge Case	Primer	START CHARGE		MAXIMUM CHARGE	
			Grain	Velocity (ft/sec)	Grain	Velocity (ft/sec)
Accurate 4350	Winchester	Federal 210	43.0	2858	47.0 C	3172
Alliant AR-Comp	Federal	Federal 210	32.0	2958	35.5	3165
Alliant Power Pro 2000-MR	Federal	Federal 210	36.2	2988	40.2	3246
Alliant Power Pro Varmint	Winchester	Federal 210	33.8	2976	37.6	3196
Alliant Reloder 10X	Winchester	Federal 210	31.0	2910	35.0	3122
Alliant Reloder 15	Winchester	Federal 210	37.0	2902	41.0	3218
Alliant Reloder 16	Federal	Federal 210	37.6	2960	41.8	3261
Alliant Reloder 17	Federal	Federal 210	39.2	3005	43.2	3293
Alliant Reloder 19	Winchester	Federal 210	46.0	3016	48.0 C	3182

Hodgdon H414	Winchester	Federal 215	40.5	2904	44.5	3236
Hodgdon H4350	Federal	Federal 210	38.7	3023	42.8	3260
Hodgdon Varget	Winchester	Federal 210	37.5	3023	41.5	3268
IMR 4350	Winchester	Federal 210	42.0	2873	46.0	3231
IMR 4895	Winchester	Federal 210	37.5	2910	41.5	3249
Ramshot Big Game	Winchester	Federal 215	39.5	2999	43.5	3240
Vihtavuori N550	Federal	Federal 210	36.4	2931	40.4	3245
Vihtavuori N560	Winchester	Federal 210	46.0	2890	50.0 C	3216
Winchester 760	Winchester	Federal 215	41.0	2991	45.0	3265

C = Compressed Load

speer-ammo.com